

J  
DRAWING NUMBER S2110  
SIZE A  
SCALE: NONE  
DATE: 5-17-85  
APPROVED BY: TD  
CHECKED BY: TD  
DRAWN BY: PJ  
2110, 2115  
FIGURE NUMBER

**SMITH® JAY R. SMITH MFG. CO.®**  
 MEMBER OF MORRIS GROUP INTERNATIONAL  
 POST OFFICE BOX 3237  
 MONTGOMERY, ALABAMA 36109-0237 (USA)  
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com


**ASPE**  
**ODI**  
**ASSE**  
 MEMBER OF:

**LOCATION**

**FLOOR DRAINS**  
**WITH 8 1/2" (215) ROUND TOPS**

**MEDIUM DUTY DRAINS**

**FUNCTION:** Used in moderate traffic areas where waste water contains no sediment or debris and floor construction requires shallow drain body. Body flange and flashing collar serve as anchor in on-grade locations and as flashing clamp when installed in waterproof floors.

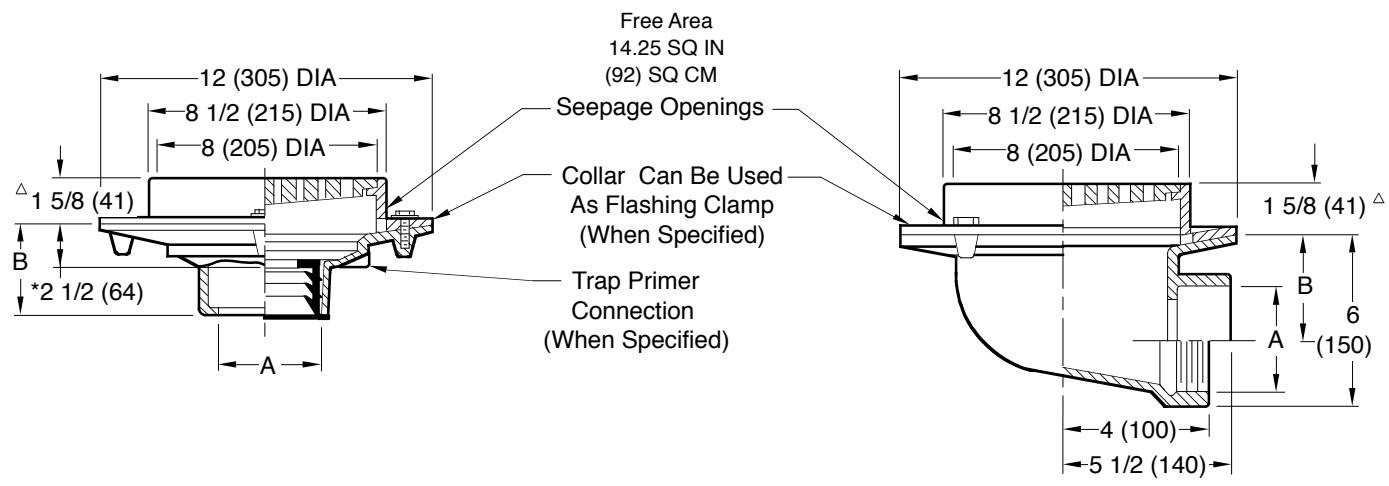

\*\*  Fig. 2110C ... CAULK OUTLET  
 Fig. 2110Y ... NO-HUB OUTLET

Fig. 2115C ... CAULK OUTLET  
 Fig. 2115T ... THREADED OUTLET

| A SIZE | 02 (50)   | 03 (75) | 04 (100)               | 06 (150) |
|--------|---|---------|------------------------|----------|
| B      | 3 3/4 (95) for Caulk, NO-HUB, and Speedi-Set, 2 (51) for Threaded |         | 3 3/4 (95) NO-HUB Only |          |

| A SIZE | 02 (50)     | 03 (75)    | 04 (100)   |
|--------|-------------|------------|------------|
| B      | 4 1/4 (110) | 3 3/4 (95) | 3 1/4 (83) |

**REGULARLY FURNISHED:**

Duco Cast Iron Body and Flashing Collar with Cast Iron Bar Grate.

**VARIATIONS:**

- Closure Plug -XP (Fig. 2110 only)
- Deflector Grate -DG
- Dome Grate -D
- Flat Bottom Strainer -FBS (Fig. 2110 only)
- L Speedi-Set Service Weight (Fig. 2110 only)
- LXH Speedi-Set Extra Heavy (Fig. 2110 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2115 only)
- Sediment Bucket -B
- Square Top -S
- Trap Primer Connection -P050 1/2" (13) & -P075 3/4" (19)
- Vandal Proof Grate -U
- Wide Flange Deck Drain (Specify Fig. DX2565)
- T Threaded Outlet
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2110 Only)

**OPTIONAL MATERIALS:**

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB
- Stainless Steel (Specify Fig. 9710)

△ Add 3/16" (5) when bronze top is specified.

\*This dimension to internal stop of Speedi-Set gasket.

\*\*Meets U.S. Gov't Spec. per WW-P-541-b, Type 220, 02 (50) and 03" (75) sizes only. \* See Fig. 2130 for 04" (100) size.

Meets ANSI Spec A112.6.3-2001 02(50), 03(75) or 04"(100) sizes only.

\*Not available on Fig. 2110T threaded outlet drain.

**NOTE:** Dimensions shown in parenthesis are in millimeters.

| REV. | DATE     | DESCRIPTION               | BY  | CKD. BY | WEIGHT POUNDS | VOLUME CUBIC FEET | FIGURE NUMBER |
|------|----------|---------------------------|-----|---------|---------------|-------------------|---------------|
| J    | 6-10-15  | Revised Variations        | TBW | CL      |               |                   | 2110, 2115    |
| H    | 4-25-14  | Revised MM                | TBW | CL      |               |                   |               |
| G    | 11/17/05 | Revised 2110 A-Size Table | JJ  | CL      |               |                   |               |
| F    | 05/10/05 | Revised ANSI note         | JJ  | AM      |               |                   |               |

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE