


ULTRA-LOW NO_x



INTELLIGENT CONTROL LOGIC

- The internal microprocessor provides enhanced operating parameters and tighter differentials for precise sensing and faster heating response to optimize performance.
- Uses a thermopile to generate the power needed to operate the electronic gas control without requiring an external power source
- The electronic gas control incorporates an LED status indicator that monitors system operation and service diagnostics.

HIGH ENERGY FACTORS

- Eco-friendly non-CFC foam insulation, heat traps and specially designed combustion chamber combine to produce a high Energy Factor for maximum savings on operating costs.

GREEN CHOICE® GAS BURNER

- Enhanced Ultra-low NO_x burner complies with SCAQMD Rule 1121 and other air quality management districts with similar requirements for NO_x emissions of less than 10 ng/J.

SELF-CLEANING DIP TUBE

- Helps reduce lime and sediment buildup and maximizes hot water output. Made from long-lasting PEX cross-linked polymer.

COREGARD™ ANODE ROD

- Our anode rods have a stainless steel core that extends the life of the anode rod allowing superior tank protection far longer than standard anode rods.

PUSH-BUTTON PIEZO IGNITOR

- Makes lighting the pilot fast and easy with one-hand push-button spark ignition

HEAT TRAP NIPPLES

- Factory-installed for faster installation

BLUE DIAMOND® GLASS COATING

- Provides superior corrosion resistance compared to industry standard glass lining.

ENHANCED-FLOW BRASS DRAIN VALVE

- Our residential water heaters have a solid brass, tamper resistant, enhanced-flow, ball type, drain valve.
- Uses a standard female hose fitting that allows for fast and easy draining during maintenance.
- Designed for easy operation, this valve includes an integral screwdriver slot that features a ¼ turn (open/closer) radius, which not only permits full straight through water flow but also a quick and positive shut off.

CODE COMPLIANCE

- Meets UBC, CEC and HUD National Codes.
- Meets the thermal efficiency and standby loss requirements of the U.S. Department of Energy and current edition of ASHRAE/IESNA 90.1.
- Complies with the Federal Energy Conservation Standards effective April 16, 2015, in accordance with the Energy Policy Conservation Act (EPCA), as amended.

CSA CERTIFIED AND ASME RATED T&P RELIEF VALVE

- Top-mounted T&P relief valve available as option.

6-YEAR LIMITED TANK AND PARTS WARRANTY

- For complete information, consult written warranty or go to www.americanwaterheater.com.



Model Number	Gallon Capacity	First Hour Rating Gallon	Energy Factor	BTU Input Natural Gas	Recovery @ 90° Rise Gallon Per Hour	Dimensions in Inches									Approx. Shipping Weight (lbs)
						A	B	C	D	E	F	G*	H*	Draft Hood	
TALL MODELS															
GU61-30T30	30	55	0.63	33,000	34	61-3/4	58	16	12	8	51-3/4	N/A	N/A	3 to 4 combo	108
GU62-30T30	30	52	0.63	30,000	31	60	56-1/2	17-3/4	11-1/4	8	49-1/4	N/A	N/A	3 to 4 combo	126
GU61-40T40	40	74	0.62	40,000	41	62	58-1/2	17-3/4	11-1/4	8	51-3/4	N/A	N/A	3 to 4 combo	132
GU62-40T40	40	70	0.62	40,000	41	62	58-1/2	19-3/4	11-1/4	8	51-3/4	N/A	N/A	3 to 4 combo	132
GU61-50T40	50	91	0.60	40,000	41	61	57-1/2	19-3/4	11-1/4	8	50-1/2	N/A	N/A	3 to 4 combo	161
GU62-50T40	50	85	0.62	40,000	41	61	57-1/2	22	11-1/4	8	50-1/2	N/A	N/A	3 to 4 combo	161
GU62-50T50*	50	98	0.60	50,000	51	61	57-1/2	22	11-1/4	8	50-1/2	12-1/4	50-1/2	4	177
SHORT MODELS															
GU62-40S40	40	69	0.62	40,000	41	51-1/2	47-3/4	22	12	8	41-1/4	N/A	N/A	3 to 4 combo	138


All models may be ordered from the factory with top T&P valve as an option.

*Side loop connections are standard on model GU62-50T50.


Models with a ring base (GU62-40S40 and GU61-30T30) are certified from sea level to 7,700 ft. elevation.

Models with a leg base (GU61-40T40, GU61-50T40, GU62-30T30, GU62-40T40, GU62-50T40 and GU62-50T50) are certified from sea level to 5,400 ft. elevation.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

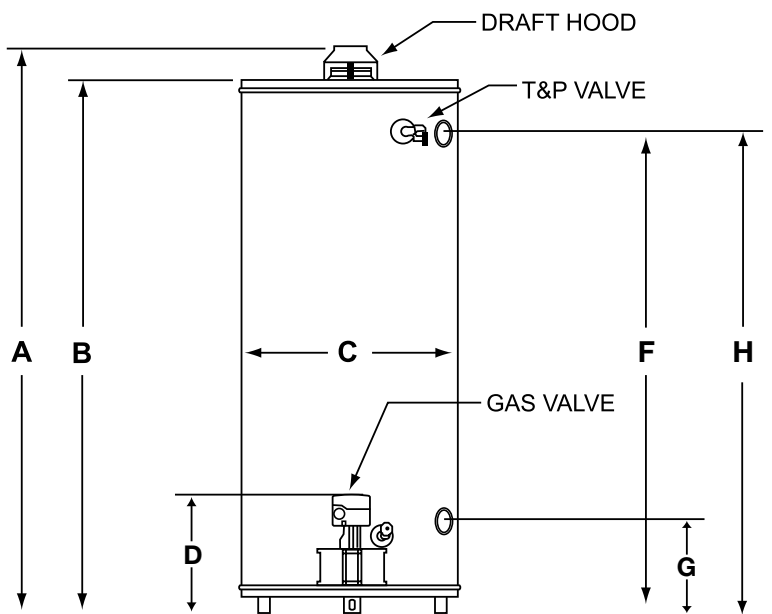

Top View

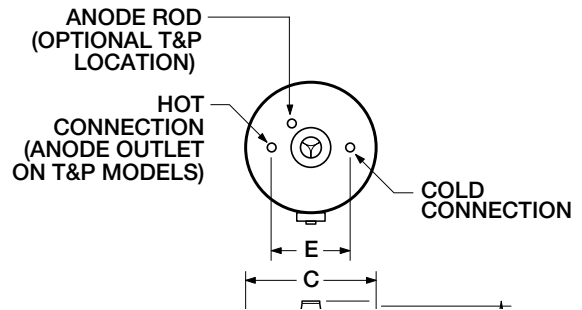

For technical information call (800) 999-9515. American Water Heaters reserves the right to make product changes or improvements without prior notice.